


SUCTION SPOUT

completely servo-assisted, with:

- Swivel joint for connection to the sludge compartment;
- Pneumatically actuated shutoff valve;
- Hose guide arm with hose;
- Featuring three hydraulic movements;
- R/L arm rotation (270° rotation);
- Raise/lower arm;
- Extend arm;
- Controls in control box and radio control.

If the setup does not feature radio control, a handheld control panel is available with the same controls, connected to the side control box via an 8-10 metre long cable

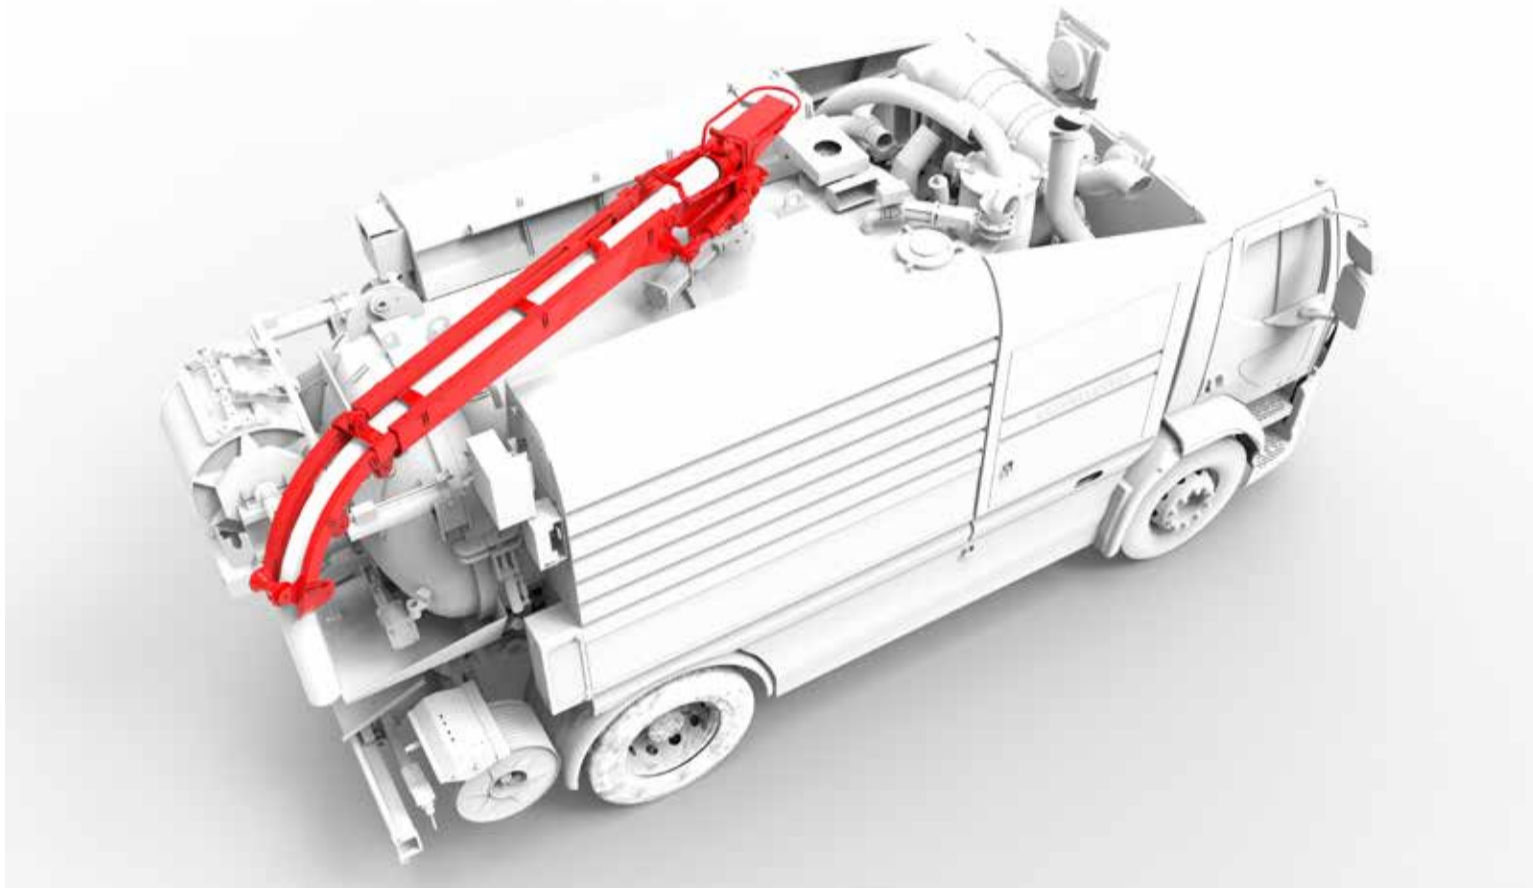

Cappelotto S.p.A.



ISO 9001:2015

Sede operativa: Via Vizza, 8 - 31018 Gaiarine (TV) Italy - Sede legale: Via Malignani, 2N - 33074 Fontanafredda (PN) - Italy
Tel. +39.0434.757575 - Fax +39.0434.75.8555 - info@cappelotto.com - www.cappelotto.com
C.F. e P.IVA 00566140265 - Cap. Soc. int. vers. euro 500.000 - C.C.I.A.A. 81648 (PN) - cappelotto@pec.it

